



## Small Signal Switching Diodes

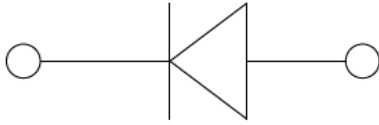

**SOD-323**

### Features

- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- $V_{RRM}$  120V to 250V
- $I_{FAV}$  200mA
- Part no. with suffix "Q" means AEC-Q101 qualified

### Applications

- General Purpose Switches Diodes

### Mechanical Data

- **Case:** SOD-323
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end
- **Marking:**

	Marking
BAV19WSQ	A8
BAV20WSQ	T2
BAV21WSQ	T3

### ■ Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	PART	VALUE
Reverse Voltage	$V_R$	V		BAV19WSQ	100
				BAV20WSQ	150
				BAV21WSQ	200
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		BAV19WSQ	120
				BAV20WSQ	200
				BAV21WSQ	250
Average Forward Current	$I_{FAV}$	mA			200
Non-Repetitive Peak Forward Surge Current	$I_{FSM}$	A	$t_p < 10\text{ms}$		1.7
Power Dissipation	$P_{tot}$	mW			250
Thermal Resistance Junction to Ambient	$R_{thJA}$	K/W			500
Maximum Junction Temperature	$T_j$	$^\circ\text{C}$			150
Storage Temperature Range	$T_{stg}$	$^\circ\text{C}$			-55 to +150



# BAV19WSQ THRU BAV21WSQ



## ■ Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS		MIN	MAX
Reverse Voltage	V <sub>R</sub>	V	BAV19WSQ	I <sub>R</sub> =100uA	100	
			BAV20WSQ	I <sub>R</sub> =100uA	150	
			BAV21WSQ	I <sub>R</sub> =100uA	200	
Forward Voltage	V <sub>F</sub>	V	I <sub>F</sub> =100mA			1.0
			I <sub>F</sub> =200mA			1.25
Reverse Current	I <sub>R</sub>	μA	BAV19WSQ	V <sub>R</sub> =100V		0.1
			BAV20WSQ	V <sub>R</sub> =150V		0.1
			BAV21WSQ	V <sub>R</sub> =200V		0.1
Diode Capacitance	C <sub>D</sub>	pF	V <sub>R</sub> =V <sub>F</sub> =0V, f=1MHz			5
Reverse Recovery Time	t <sub>rr</sub>	ns	I <sub>F</sub> =30mA, I <sub>rr</sub> =0.1I <sub>R</sub> , R <sub>L</sub> =100Ω			50

## ■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAV19WSQ THRU BAV21WSQ	F2	Approximate 0.0045	3000	30000	120000	7" reel



## ■ Characteristics (Typical)

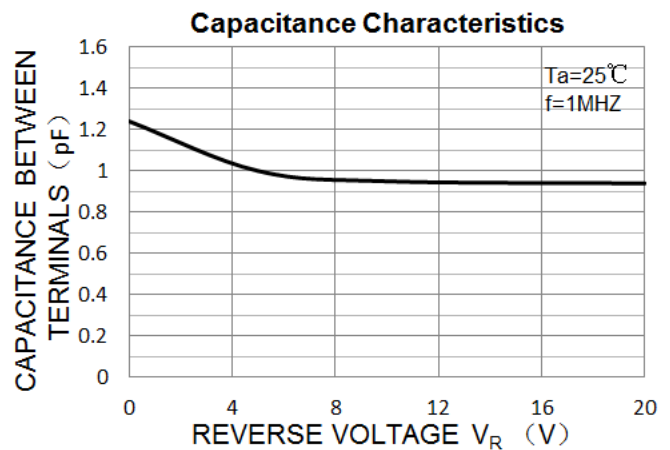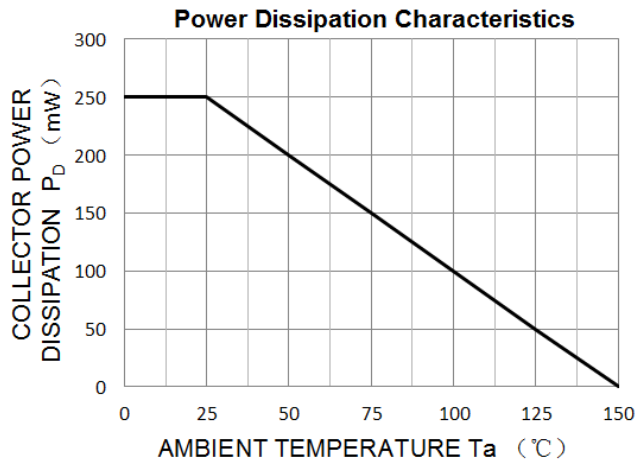




# BAV19WSQ THRU BAV21WSQ

## ■ Characteristics (Typical)

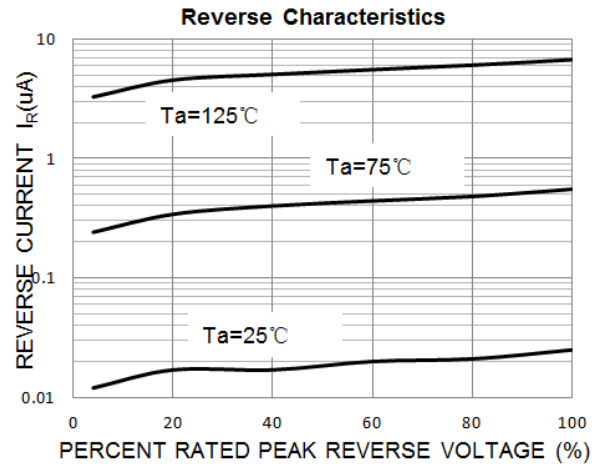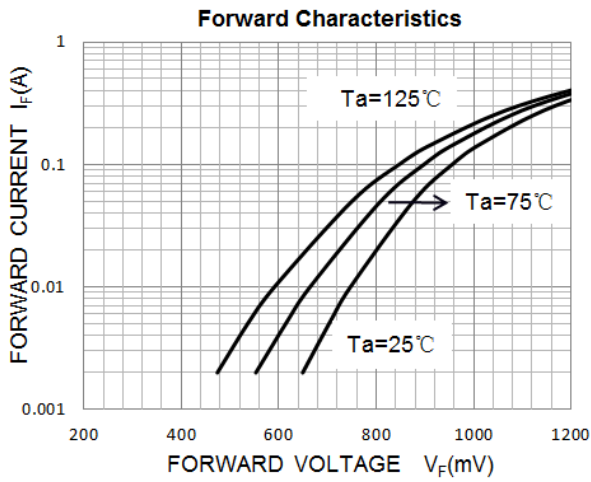


## ■ Outline Dimensions

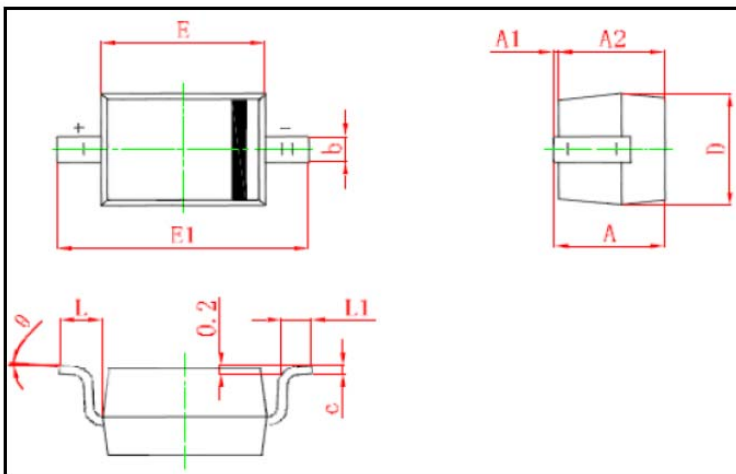

Symbol	Min.(mm)	Max.(mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
$\theta$	0°	8°

## ■ Soldering Footprint

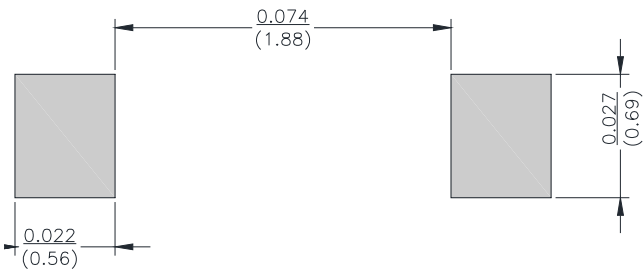

Unit:  $\frac{\text{inch}}{\text{mm}}$



## BAV19WSQ THRU BAV21WSQ

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.